

HOOTER WITH STROBE

MODEL NO- C-100SS

Experience a new benchmark in emergency alert signaling with the 100-Series Hooter with Strobe — where performance meets precision. Designed for integration into advanced fire and security ecosystems, this unit delivers both audible and visual clarity, transforming emergency alerts into immediate actionable awareness.

Featuring a high-intensity LED strobe, the system ensures exceptional visibility across long indoor ranges, allowing critical warnings to be recognized within seconds. Its powerful sound output is engineered for environments where ambient noise levels are high, ensuring that no alert goes unnoticed.

Crafted exclusively for indoor applications, the 100-Series stands out in commercial, industrial, and institutional settings, where reliability and rapid response are paramount. Its premium build and refined design make it not just a safety device — but an essential enhancement to modern protection infrastructure.

Elevate safety. Amplify awareness. Choose performance without compromise.

FEATURES & BENIFITS :

- Dual Signaling Technology.
- High-Intensity LED Strobe.
- High Sound output 85-90 db.
- Enhanced Audible Performance.
- Suitable for noisy area.
- Low Power Consumption.
- Refined Compact Design.
- Optimized for Indoor Applications.
- Suitable For mall, bank, industries, restaurants etc.
- Four Type tone available.
- Low Maintenance Operation.
- Fully Confirm IS:2189.





ELECTRICAL SPECIFICATION

Operating Voltage	22-24V DC
Current Consumption in fire condition	120mA Approx
Standby Current	NA
Audio Element	Pizzzo
Sound Output	90-95 dB

ENVIRONMENTAL INFORMATION:

Operating Temperature	0 °C to + 65 °C
Operating Humidity	5 to 95% Relative Humidity (non- condensing)


MECHANICAL SPECIFICATION:

Dimension W X H XD (MM)	120 X 120 X 50 mm
Weight	200 g
Colour	Red
Housing	ABS

WIRING DIAGRAM:



CONNECTION DIAGRAM:

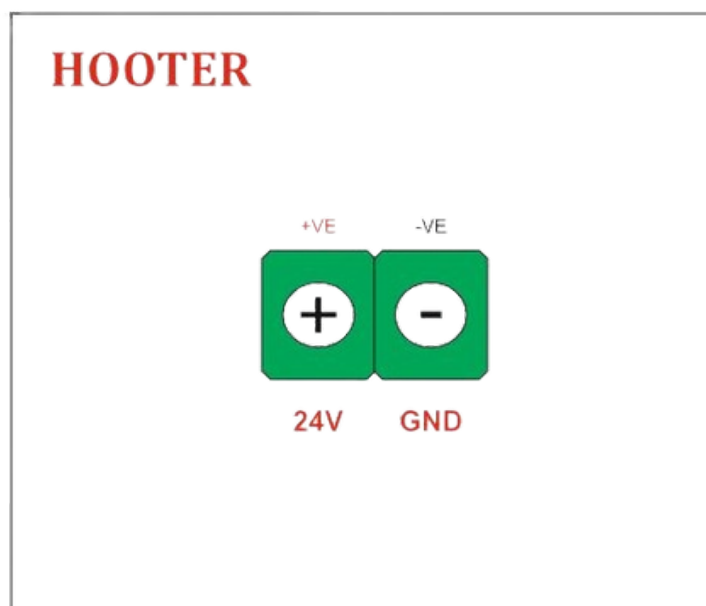

ORDERING INFORMATION:

MODEL NO	PACK QTY.	DIMESION (WXHXD) MM	WEIGHT
C-100SS	1	120X 120 X50	200 g

